

ATA-3000 Series Power Amplifier



High current, high power

Input and output resistance adjustable

One key saving common settings

Technical Index

Bandwidth (-3dB) up to DC~100kHz

Maximum output power 810Wp

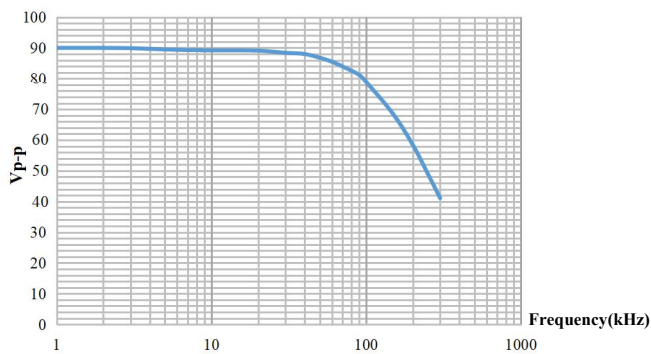
Adjustable voltage gain

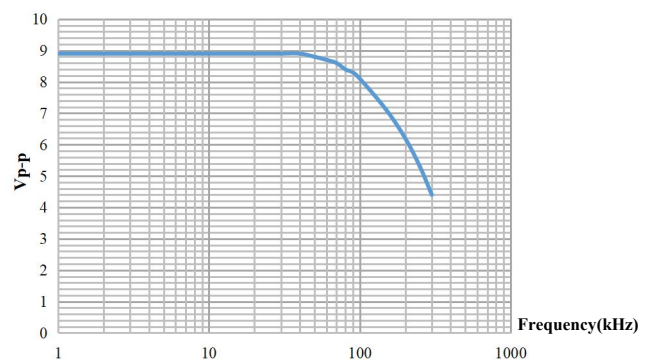
Introduction

ATA-3000 series power amplifier is an ideal power amplifier that can amplify AC and DC signals. The maximum output power is 810Wp, which can drive power load. The voltage gain can be adjusted by numerical control, and the common settings can be saved by one key. It can be used with mainstream signal generator to realize perfect signal amplification.

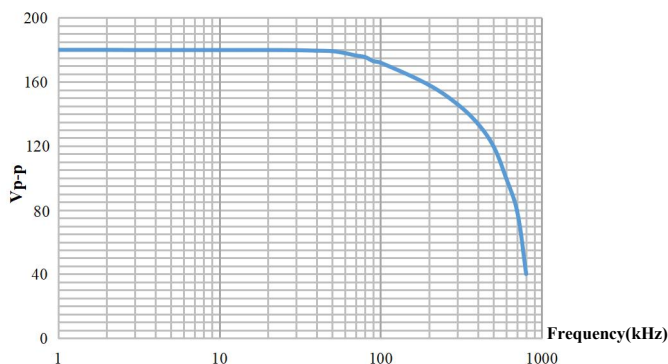
Model	ATA-3040	ATA-3080	ATA-3090
Output form	Single output	Differential output	Single output
Bandwidth (-3dB)	DC~100kHz	DC~100kHz	DC~100kHz
Maximum output voltage	90Vp-p ($\pm 45Vp$)	180Vp-p ($\pm 90Vp$)	90Vp-p ($\pm 45Vp$)
Maximum output current	4Ap (DC~50Hz)	4Ap (DC~50Hz)	9Ap (DC~50Hz)
	8Ap (>50Hz)	8Ap (>50Hz)	18Ap (>50Hz)
Maximum output power	360Wp	720Wp	810Wp
Fuse	8A/250V	8A/250V	10A/250V
Voltage gain	x0~30 (0.1 step/1 step)	x0~60 (0.1 step/1 step)	x0~30 (0.1 step/1 step)
Load R_L upper limit	$\geq 11.15\Omega$ (DC~50Hz)	$\geq 22\Omega$ (DC~50Hz)	$\geq 4.9\Omega$ (DC~50Hz)
	$\geq 5.5\Omega$ (>50Hz)	$\geq 10.75\Omega$ (>50Hz)	$\geq 2.4\Omega$ (>50Hz)
Output resistance	0.1 Ω /50 Ω (Customizable)	0.5 Ω /100 Ω (Customizable)	0.1 Ω /50 Ω (Customizable)
Slew Rate	$\geq 20V/\mu s$	$\geq 40V/\mu s$	$\geq 20V/\mu s$
Input resistance	50 Ω / 5k Ω		
Input amplitude	0~10Vp-pMAX		
Output voltage error	$\leq \pm 3\%FS@1kHz$		
Total harmonic distortion (THD)	$\leq 0.1\%@1kHz, 90Vp-p$		
Output voltage zero-point drift	$\leq \pm 0.3V$		
Signal-noise ratio(SNR)	$\geq 80dB$		
Output Connector	4mm Banana socket		
Protection	Overcurrent protection		

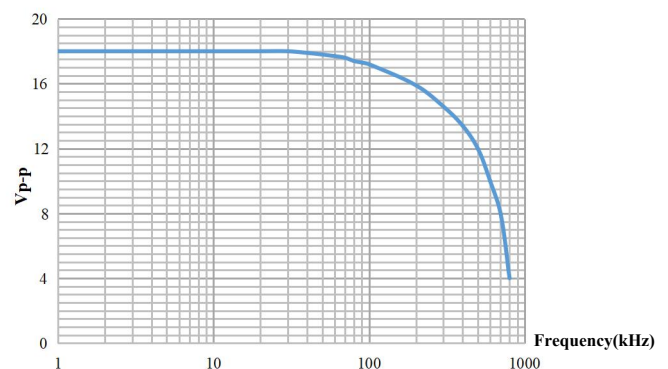
Signal Ground	It is connected with the grounding of the shell and the power line
Supply voltage	AC220V±10%, 50Hz
Operating temperature	0°C~45°C
Storage temperature	-20°C~50°C
Humidity	≤80%RH, no condensation
Size (W * H * D)	440*163*470mm

ATA-3040

 Amplitude-frequency characteristic
 (Maximum output voltage V_{p-p})

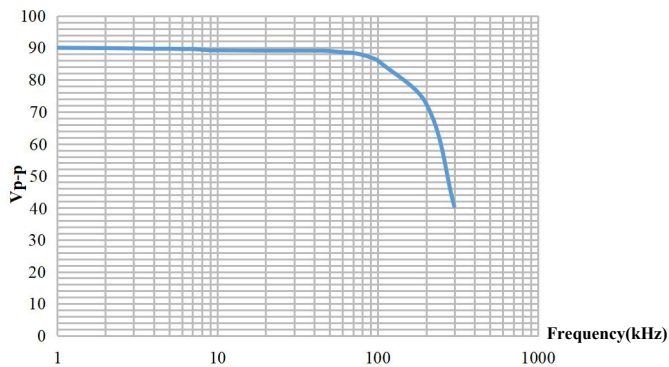
ATA-3040


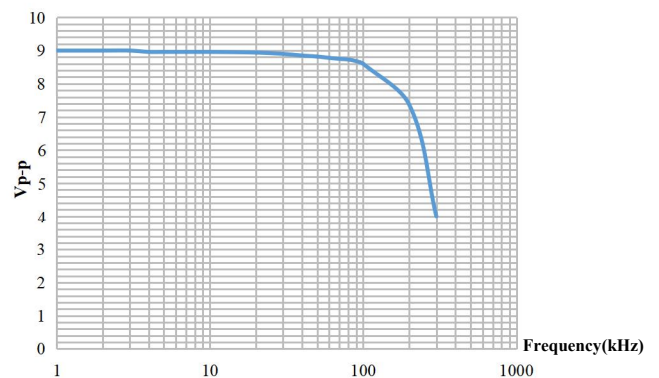
Small signal amplitude-frequency characteristic

ATA-3080

 Amplitude-frequency characteristic
 (Maximum output voltage V_{p-p})

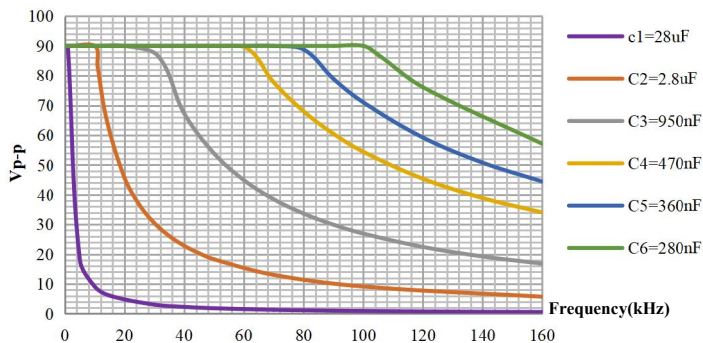
ATA-3080


Small signal amplitude-frequency characteristic

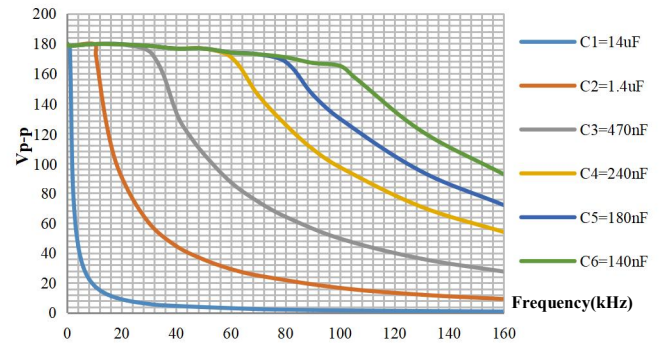
ATA-3090

 Amplitude-frequency characteristic
 (Maximum output voltage V_{p-p})

ATA-3090


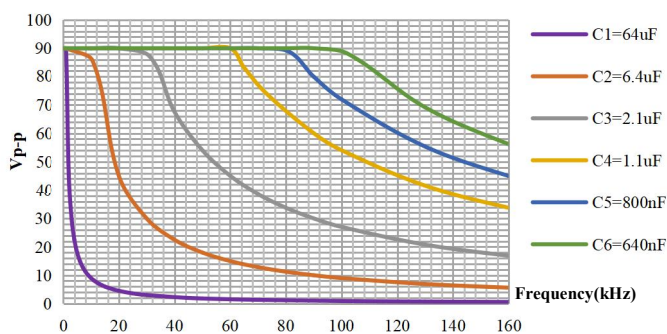
Small signal amplitude-frequency characteristic

ATA-3040


ATA-3040 Capacitive loads curve

ATA-3080


ATA-3080 Capacitive loads curve

ATA-3090


ATA-3090 Capacitive loads curve

Xi'an Aigtek Electronic Technology Co., Ltd.

Address: Zhicheng Business, No.17, Gaoxin 4th Road, Xi 'an Hi-tech Industrial Development Zone

Tel: (+86) 029-88865020

Email: aigtek01@gmail.com

 Website: <http://www.aigtek.com>