




Installation instructions for Rear Set Aprilia RSV4 year 2017 - Part nr. 507



We would like to thank you for purchasing PP Tuning rear sets. Please take a moment to read the assembly instructions. Following these instructions will ensure trouble free operation of this product and extend its working life.

Left side installation

Remove the original rear set and mount the PP rear set as shown in picture No. 1 and 2.

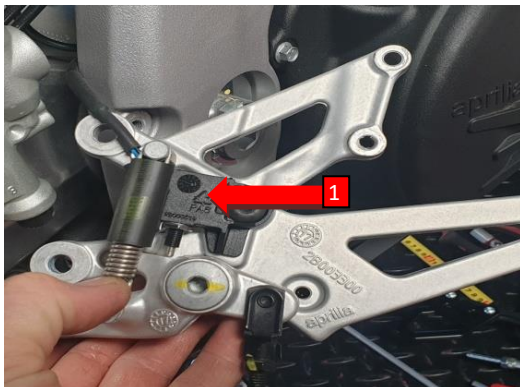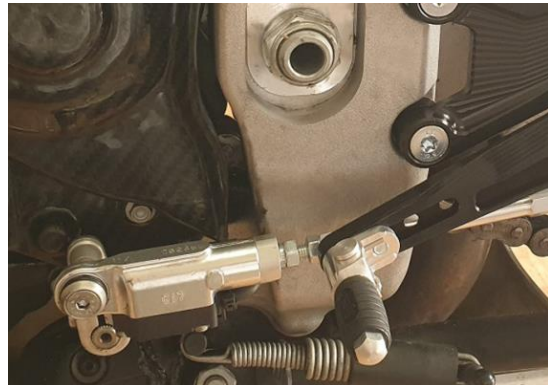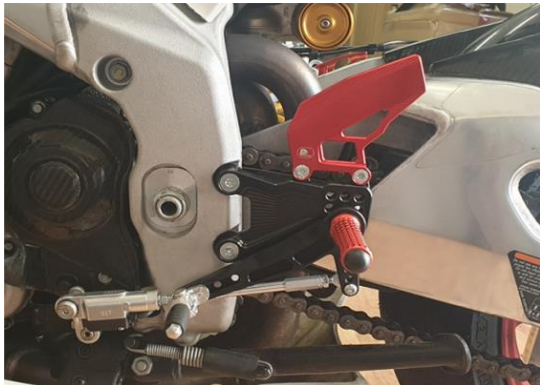

Right side installation

Pictures No. 3-5 show the correct way to install the right side. Remove the brake sensor from OEM footpeg marked with red arrow No. 1. This brake sensor install to PP rear set. By turning the excenter (marked with red arrow No. 2) you will achieve the correct operation of the brake lever. The lever must not have upward play. Use the aluminum part marked with red arrow No. 3 to adjust brake sensor that switches the brake light. The aluminum part can be moved up and down as needed.

