

# PVF BKIT 1

## LOAD RESISTORS FOR EFT/BURST VERIFICATION



### FOR TESTS ACCORDING TO ...

- > EN 61000-4-4
- > IEC 61000-4-4
- > ISO 7637-1:1990
- > ISO 7637-2:1990
- > ISO 7637-2:2004
- > ISO 7637-2:2011
- > ISO 7637-3:1995
- > ISO 7637-3:2007

### CALIBRATION SET FOR EFT/BURST GENERATORS

The pulse shape of EFT/burst generators designed as per IEC 61000-4-4 have to be verified both into a 50 ohm and a 1,000 ohm load at the 50ohm coaxial HV output as well into 50 ohm load at the output of the coupling network where the DUT is connected when testing mains supply lines.

The PVF BKIT 1 includes the load resistors and a set of adapter to connect the coaxial matching resistors appropriately to the DUT output port.

### HIGHLIGHTS

- > **Calibration kit as per IEC 61000-4-4**
- > **Also used as per ISO 7637, Annex D**
- > **50 ohm load resistor included**
- > **1,000 ohm load resistor included**
- > **Adapters provided to adapt the load resistors to the output of the coupling network for easy measurement**

### APPLICATION AREAS



AUTOMOTIVE



RESIDENTIAL



INDUSTRY



MEDICAL



BROADCAST



TELECOM

**TECHNICAL DETAILS**

**PVF 50**

**MEASURING EXAMPLE USING THE PVF 50**


Open circuit voltage setting at the EFT/burst generator (50 ohm output): 2,000 V

Resulting output voltage across the 50 ohm matching resistor: 1,000 V.

Measuring voltage  $V_m$ : 10 V

Measured voltage considering the 50 ohm input impedance of the oscilloscope: 5 V

Resulting attenuation (theoretical): 400:1

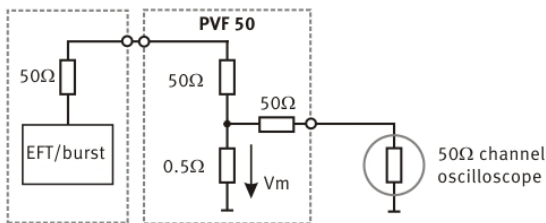

**PVF 1000**

**MEASURING EXAMPLE USING THE PVF 1000**


Open circuit voltage setting at the EFT generator (50ohm output): 2,000 V

Resulting output voltage across the 1,000 ohm matching resistor: 1,905 V

Measuring voltage  $V_m$ : 4 V

Measured voltage considering the 50 ohm input impedance of the oscilloscope: 2 V

Resulting attenuation (theoretical): 1,000:1

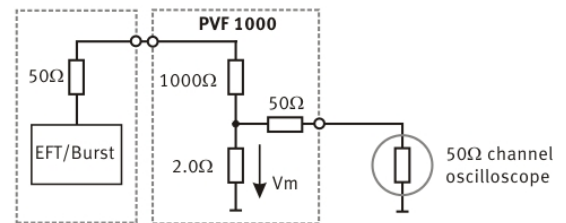

## TECHNICAL DETAILS

## PVF 50, 50 OHM LOAD RESISTOR

## TECHNICAL DATA FOR PVF 50

Input Voltage	Max. 8,000 V
Input impedance	50 ohm +/-2%
Output impedance	50 ohm
Divider ratio	100:1
Dimension	155 mm x 26 mm x 26 mm
Weight	Approx. 150 g
	The divider ratio in a 50 ohm systems is n = 400

## PVF 1000, 1 KOHM LOAD RESISTOR

## TECHNICAL DATA FOR PVF 1000

Input Voltage	Max. 8,000 V
Input impedance	1,000 ohm +/-2%, <6 pF
Output impedance	50 ohm
Divider ratio	500:1
Dimension	155 mm x 26 mm x 26 mm
Weight	Approx. 150 g
	The divider ratio in a 50 ohm systems is n = 1,000

## PVF AD 1 ADAPTER

## TECHNICAL DATA FOR PVF AD 1

Function	Adapter 4 mm/6 mm to coaxial SHV connector, (to match the coupling network to the load resistor)
CDN connection	exchangeable banana plug, for 4 mm or 6 mm plug
Earth connection	4 mm banana, connection to earth plug on front panel
Dimension	78 mm x 45 mm x 26 mm
weight	approx. 65 g

## GENERAL DATA

## ENVIRONMENT

Temperature	10° C to 40° C
Rel. humidity	Max. 85 %, non condensing
Atmospheric pressure	86 kPa (860 mbar) to 106 kPa (1,060 mbar)

## OPTIONS

## CAPACITIVE COUPLING CLAMP

CCI	Capacitive coupling clamp, testing for signal- and datalines, IEC 61000-4-4, IEC 61000-4-18
-----	---

## CCI PVKIT 1 (KIT FOR CCI CALIBRATION)

Transducer plate	Insulated copper poil with 4 mm connection plug, Insulation: 1,100 mm x 130 mm, Copper foil: 1,050 mm x 120 mm
Acrylblock (support)	Support for measuring adapter PVF 50 on 100 mm level for capacitive coupling clamp verification
PVF AD3	Adapter 4 mm to coaxial SHF connector, (connection Load resistor to transducer plate)

# COMPETENCE WHEREVER YOU ARE



## CONTACT EM TEST DIRECTLY

### Switzerland

AMETEK CTS GmbH > Sternenhofstraße 15 > 4153 Reinach > Switzerland  
 Phone +41 (0)61 204 41 11 > Fax +41 (0)61 204 41 00  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com) > E-mail: [sales.conducted.cts@ametek.com](mailto:sales.conducted.cts@ametek.com)

### Germany

AMETEK CTS Europe GmbH > Customer Care Center EMEA > Lünener Straße 211  
 > 59174 Kamen > Germany  
 Phone +49 (0) 2307 26070-0 > Fax +49 (0) 2307 17050  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com) > E-mail: [info.cts.de@ametek.com](mailto:info.cts.de@ametek.com)

### Poland

AMETEK CTS Europe GmbH > Biuro w Polsce > ul. Twarda 44 > 00-831 Warsaw > Poland  
 Phone +48 (0) 518 643 12  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com) > E-mail: [Infopolska.cts@ametek.com](mailto:Infopolska.cts@ametek.com)

### USA / Canada

AMETEK CTS US > 52 Mayfield Ave > Edison > NJ 08837 > USA  
 Phone +1 732 417 0501  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com) > E-mail: [usasales.cts@ametek.com](mailto:usasales.cts@ametek.com)

### P.R. China

AMETEK Commercial Enterprise (Shanghai) Co. Ltd.> Beijing Branch>  
 Western Section, 2nd floor> Jing Dong Fang Building (B10)> Chaoyang  
 District>Beijing, China, 100015  
 Phone +86 10 8526 2111 > Fax +86 (0)10 82 67 62 38  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com) > E-mail: [chinasales@ametek.com](mailto:chinasales@ametek.com)

### Republic of Korea

EM TEST Korea Limited > #405 > WooYeon Plaza > #986-8 > YoungDeok-dong >  
 Giheung-gu > Yongin-si > Gyeonggi-do > Korea  
 Phone +82 (31) 216 8616 > Fax +82 (31) 216 8616  
 Internet: [www.emtest.co.kr](http://www.emtest.co.kr) > E-mail: [sales@emtest.co.kr](mailto:sales@emtest.co.kr)

### Singapore

AMETEK Singapore Pte. Ltd > No. 43 Changi South Avenue 2 > 04-01 Singapore  
 48164  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com) > E-mail: [singaporesales.cts@ametek.com](mailto:singaporesales.cts@ametek.com)

### Great Britain

AMETEK GB > 5 Ashville Way > Molly Millars Lane > Wokingham > Berkshire  
 RG41 2 PL > Great Britain  
 Phone +44 845 074 0660  
 Internet: [www.ametek-cts.com](http://www.ametek-cts.com)

Information about scope of delivery, visual design and technical data correspond with the state of development at time of release. Subject to change without further notice.