

Installation instructions for Rear Set Yamaha MT09, year 2021 - Part nr. 693




We would like to thank you for purchasing PP Tuning rear set. Please take a moment to read the assembly instructions. Following these instructions will ensure trouble free operation of this product and extend its working life.

Left side installation

Remove the original rear set and mount the PP rear set as shown in picture. Location of rear set is the same as the original rear set.

Original shift levers joint marked with an arrow connect to shift rod which is a part of PP Tuning rear set.



It is very important to use this short shift rod due to correct setting of the gear lever.

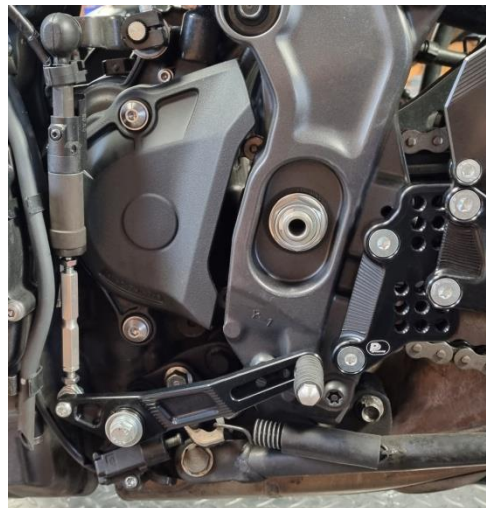

Right side installation

Remove the original rear set and brake light switch with spring on the back side. Install sensor of brake light to PP rear set 693. Make sure that you will use the little spring that is a part of the package.

You must adjust the spring for the proper function of brake light (picture A). The inclination of the brake lever can be adjusted with Joint M8 (picture B).

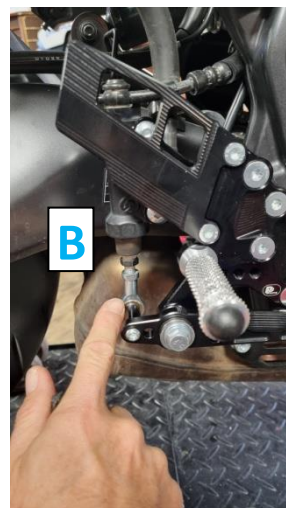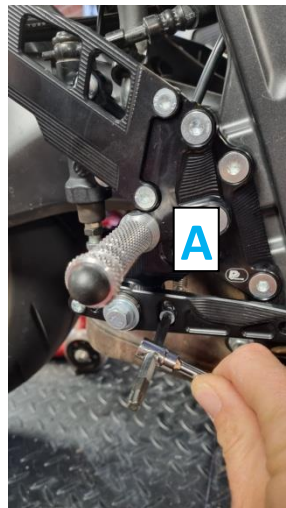

And the last important information: Enjoy this product and drive carefully!

PP Tuning Team