



Installation instructions for Rear Set Aprilia RS 660 (2021-), Part Nr. 506

Left side installation

Installation the left side with the shifter as shown in pic. 1 (OEM shifting) and pic. 2 (reverse shifting). We recommend using the first hole (closer to the center of the shift lever) when installing the shift rod for both the reverse and OEM shifting. The remaining holes can also be used, but will affect the shift step and shift lever resistance. The longer shift rod (95mm) is for OEM shifting and the shorter shift rod (85mm) is for reverse shifting.

If you decide to remove the side stand, you must replace it with a washer (Nr. 123201010) - can be ordered separately.




For the shifting to work properly, it is necessary that the upper and lower joint always have a right angle of 90°.

Pic. 3 shows the correct angle.

Pic. 4 shows the wrong angle / settings. This can negatively affect the shifting and riding of the motorcycle.

The 90° rule applies to all rearsets and shifting. This rule guarantee easy shifting and save your transmission (gearbox).

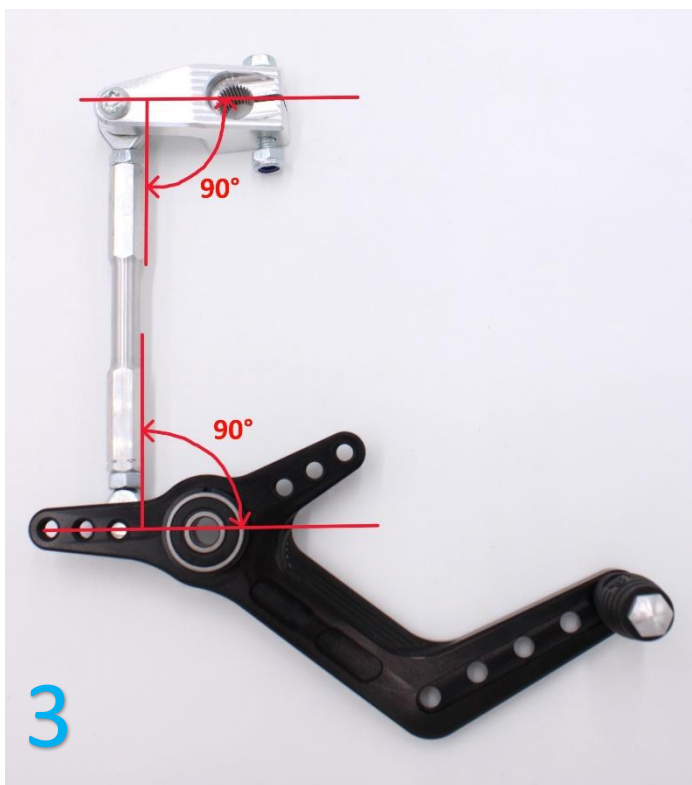

PP Tuning Racing Parts, Jezeřany-Maršovice 328, 671 75 Loděnice, Czech Republic

www.pptuning.eu

Thank you for purchasing our product. We wish you many happy miles without accidents.

Right side installation

For installing the right side with brake lever (pedal), follow the steps in pic. 5 + 6.

Install the original brake sensor cover on to the sensor holder. Secure both screws (M5x16 and the original brake sensor cover screw) with Loctite 243.



PP Tuning Racing Parts, Jezeřany-Maršovice 328, 671 75 Loděnice, Czech Republic

www.pptuning.eu

Thank you for purchasing our product. We wish you many happy miles without accidents.