




EM-IP-K4021-UX

Fanless Industrial Small Form Factor PC



SPECIFICATION

Chassis	Dimension (W x L x H): 220 x 150 x 75 mm
	Colour: Silver / Black / on request (min. 20 pcs)
	Material: anodized aluminium, IP50 protected
	4x rubber feet
Drive bays and internal positions	2x M.2 Key-M NVMe SSD, 1x M.2 Key-B PCIe, 1x WLAN
	MB: 140 x 148 mm, miniSTX (Kontron K4021-Ux)
	Integrated I/O shield
Front panel	Power button with LED backlight
	USB 3.2 Gen2 + USB Type-C, Audio Line in + Line out, optional: USB, COMs
Rear panel	2x DisplayPort V1.4a, DC-In connector 9-24V
	1x 5G LAN + 1x 1G LAN, 4x USB 3.2 (1xUSB-C), Optional up to 4x COM
Mounting options	Wall mount (pair)
	VESA holder
	DIN Clip kit
	Other customization: min. 20 pcs




ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.





kontron

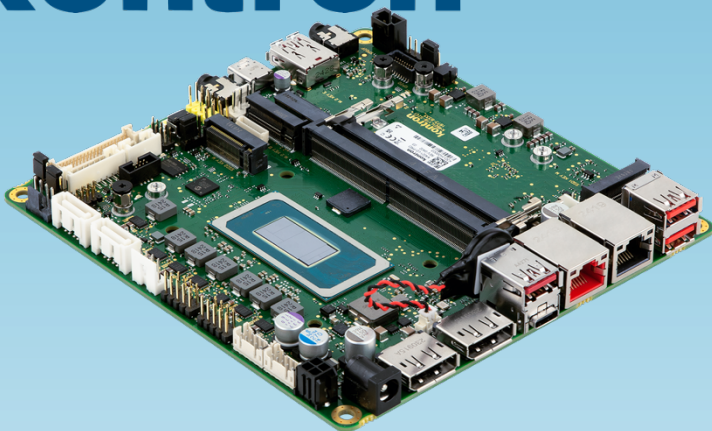

MAINBOARD

K4021-Ux MINI-STX



Supported Memory	2x DDR5 5600MHz (SO-DIMM), up to 96GB
CPU options	K4021-U2: Intel® Core Ultra 5 125U
	K4021-U5: Intel® Core Ultra 7 155U
I/O Interface	2x DisplayPort V1.4a
	Audio: Line in/ Line out
	6x USB 3.2 Gen2 (2x USB Type-C), 4x USB 2.0 (option), 0-6x RS232 (option)
	2x M.2 PCIe Key-M NVMe SSD, 1x M.2 Key-B SSD, 1x M.2 PCIe Key-E WLAN
	1x 5GbE + 1x 1GbE LAN
	DC-In connector 9-24V / 20V PD Sink USB-C
Product features	System Guard, Wake-on-LAN (WoL)
	HW Watchdog, Intel TPM V2.0 onboard

ALL PRODUCT SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

