



- For military / governmental / traffic / critical buildings
- Shielded for (nuclear) electro magnetic pulse
- HD / IP Cam with ONVIF

E1 & E2 HARDENED HD IP COLOUR CAMERA

As the threat of a nuclear attack and also the trend to use electro-magnetic weapons (intentional electromagnetic interference – IEMI) are constantly growing, there is demand for CCTV systems, which can survive such attacks. Lightning strikes in close vicinity also cause high electromagnetic pulses (EMP).

Besides the regular EMC shielding that guarantees low emission and high immunity, the PONTIS (N)EMP cameras use a special magnetic shielding and dedicated EMP filters that can handle the very high field strengths and induced currents, occurring with EMP and NEMP pulses. In addition to the electro-magnet immunity the cameras can also withstand harsh environmental conditions.

There are three versions available:

- In door use (0° to 70 °C)
- Weather proof: IP 64 (-40 °C to +60 °C)
- Extended version with sealed housing for very hot and dusty environment: IP64 (-30 °C to +75 °C)

In most cases these cameras need to be integrated in existing CCTV and surveillance systems. The NEMP camera offers an IP interface, that is compatible with many surveillance software applications (supporting also ONVIF).

The PONTIS NEMP CCTV system is composed of the actual camera inside a weather proof housing and a separate shielded power supply. The data communication (Ethernet) is by fibre optics. All cables for the power supply need to be specially shielded. Inside the camera housing and the power supply there is a special mechanical shielding and high performance filters.

FEATURES:

- Protected against class E1 & E2 pulse (short & intermediate)
- Optional remotely controlled Pan/Tilt
- Data communication (Ethernet) via fibre optic cables
- IP camera with ONVIF support
- Extended features: manual iris control, including wide dynamic range, Long exposure , image stabiliser
- HD video
- Weather protection IP65

ACCESSORIES:

required:

- Power supply (hardened)
- Fibre optic cables

optional:

- Pan/Tilt unit (hardened)
- Sun shield


APPLICATIONS:

- Traffic surveillance (lightning safe)
- Object surveillance in critical environments
- Military and governmental buildings

(N)EMP Cam

TECHNICAL DATA

| | |
|--|--|
| Video signal system | H.264, MJPEG, MPEG-4 (IP Cam, ONVIF support) |
| Resolution | 1,920 x 1,080 Full HD |
| Minimum illumination | 0,3 Lux @ 1.65 color |
| Zoom | f4.44 – 142.6 mm: 32 x optical (motorized), 16 x digital |
| Focus | automatic / manual |
| White balance | automatic |
| Image stabilisation | On/Off |
| Glass fibre | 50/125 µm glass fibre with ST-connectors |
| Operating temperature / humidity / weather proof | – Indoor use (0° to 70 °C) – Weather proof: IP 64 (-40 °C to +60 °C) – Extended version: IP64 (-30 °C to +75 °C) |
| External dimensions ID/OD | 590 x 175 x 168 mm (L x W x H) (incl. sunshield) |
| External dimensions EXT | 600 x 200 x 219 mm (L x W x H) |
| Weight ID/OD | approx. 10 kg |
| Weight EXT | approx. 15 kg |
| Weight Pan / Tilt | approx. 11 kg |
| Camera supply | 24 VAC, 50 / 60 Hz |
| Power supply (hardened) | 115 / 230 VAC, 50 / 60 Hz |
| Immunity | Short pulse E1 & intermediate pulse E2 |
| Compliance | MIL-STD-188-125-1 |
| Pan / Tilt (hardened) | external, option; Pan 350 °, Tilt -80 / +20 °, max. load 25 kg |

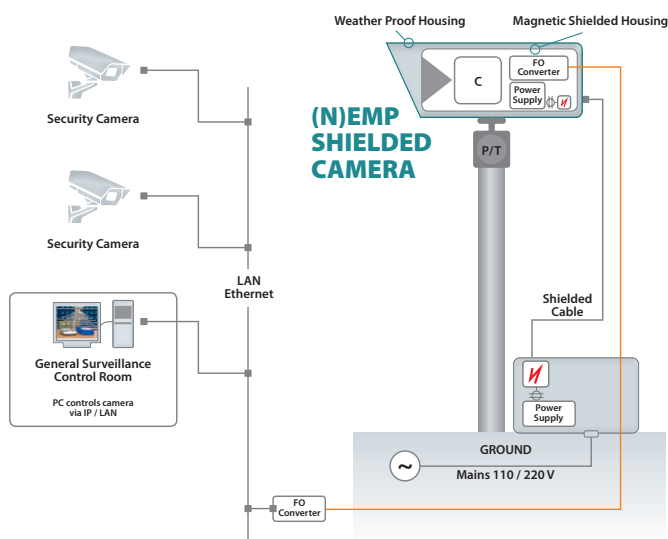

Prices and specifications are subject to change without notice!

PONTIS EMC Products designed and manufactured by:

PONTIS
EMC PRODUCTS
A BRAND OF AUDIOVO

Audiovo GmbH
Irrenloher Damm 30
92521 Schwarzenfeld
Germany

Phone +49(9435) 54 19-0
Fax +49(9435) 54 19-19
info@audiovo.com
www.audiovo.com

You can contact directly our local partners for sales and technical support



www.hvtechnologies.com



www.toyo.co.jp



zongkui.shao@pontis-emc.com