

## CBA 1G-1200D

### 80 MHz to 1 GHz 1200 Watt Solid State Amplifier




A high power density, design has allowed us to produce a 1200 watt 80MHz to 1GHz amplifier in a compact 10U package. With a minimum of 900 watts of linear power this amplifier is ideal for RF immunity testing to various industry standards such as IEC61000-4-3, MIL-STD 461, ISO11452 and RTCA DO160. Compatible with a wide range of available antenna and test systems such as the Teseq NSG4070 and NSG 6000 these amplifiers can be easily built into integrated test systems. The touch screen colour display gives an immediate visual indication of forward and reverse power along with the current operating status of the amplifier and access to diagnostic information such as gate current and heatsink temperature.

Fan speed adjusts depending on the heatsink temperature thus ensuring the minimum audio noise level possible in the operating environment. The inbuilt calibrated directional coupler provides a quick and easy way to monitor forward and reflected power with any power meter. Input over-drive protection prevents damage to the input devices due to accidental high input power. Multiple remote interfaces are available as standard including USB, GPIB, RS232 and Ethernet. Amplifier gain can be controlled either remotely through one of the available interfaces or via the front panel touch screen.

#### MAIN FEATURES

- Intuitive user interface
- Input Overdrive protection
- USB, Ethernet, GPIB and RS232 interface
- Built in Calibrated Directional Coupler
- 3 year warranty

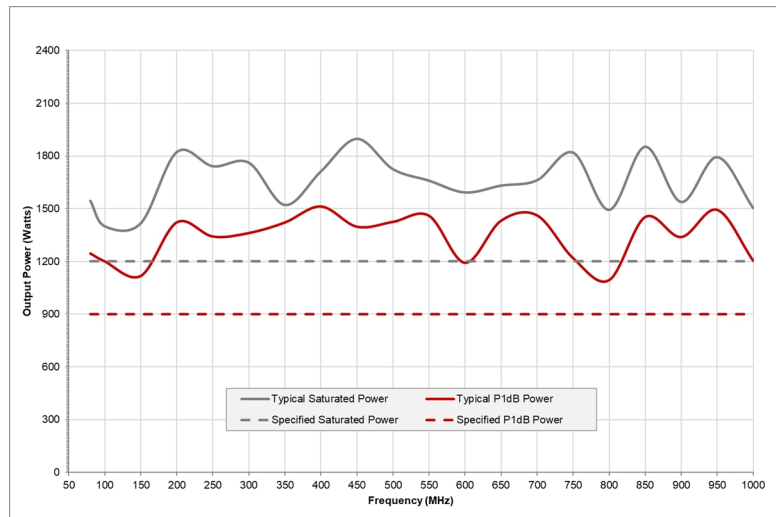

**Technical Specifications**

Frequency Bands	Single Band
Frequency (min.) MHz	80 MHz
Frequency (max.) GHz	1 GHz
Psat (min)	1200 W
P1dB (min.)	900 W
Small Signal Gain	55.5 dB
Gain Variation (max) ±	+/- 3.0 dB
Harmonics @ P1dB	-18 dBc
Spurious (min.)	-70 dBc
3rd Order Intercept Point	10 db > P1dB
Modulation Formats	AM, FM, Pulse
Maximum Input Power (no damage)	10 dBm
Gain Control	0-20 dB in 255 Steps
Output VSWR Tolerance	Infinite any phase (< 4:1 no foldback, > 4:1 gradual foldback)
Stability	Unconditional
Output Impedance	50 Ohm
Input VSWR	2:1 (max)
Output VSWR	2:1 (typical)

**General Specifications**

Safety Interlock	Via rear panel mounted BNC-female
Supply Voltage	Three Phase, STAR 5 Wire 380 to 415 VAC / DELTA, 4 Wire, 208 to 240 VAC
Supply Frequency	47 to 63 Hz
Supply Power (typ.)	6 kVA
RF Input Connector	Type N Female
RF Output Connector	Type 7/16 female
Com. Interface	GPIB, RS232, Ethernet & USB
Weight kg	95 kg
Dimensions mm	19 inch, 10U Rack Case, 686 mm Deep (HxWxD)
Cooling System	Air Cooled, Self-contained

**Available Variants**

Product	Configuration	Item #
CBA 1G-1200D	Front Panel RF Connectors	CBA 1G-1200D
CBA 1G-1200D-10	Rear Panel RF Connector	CBA 1G-1200D-10