

<Custom>

Large Type Air to Air Thermal Shock Chamber TSA Series

Thermal Shock Chamber for large and heavy components

Features

- **Meets international and automotive testing standards (2-zone shock testing – hot and cold)**

IEC 60068-2-14 Na

ISO 16750-4

ISO 19453-4

LV 124 K-05/K-16

and more...

- **Thermal shock chamber with unique air damper system**

Test samples with mechanical shock free
(Fixed test area type)

- **Continuous testing without defrosting is possible by a unique mechanism**


Defrost-free mechanism [patent 3514735]
(Standard feature)

- **3-zone shock testing is also available**

One rapid temperature change rate chamber allows
3-zone shock testing - cold, hot or ambient



TSA-1650H-W

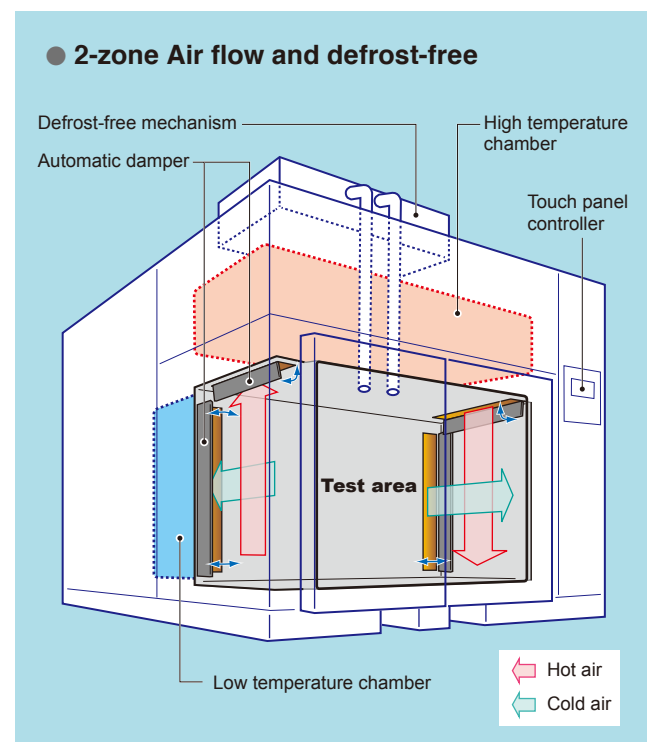

Features


● Experience innovative thermal shock testing

- Safety options for battery testing are available
- Environmental friendly refrigerant R-449A

● Effective test preparation tips

- Designed to accommodate hand-lift truck for easier carry-in and carry-out of large and heavy components.
- Equipped with cable ports at a lower position to access test samples without a stepladder, enable to wiring a one-man-job.

● Carrying-in and out (image)

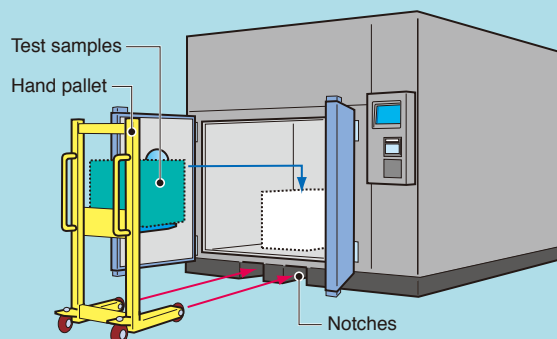

For Automotive, Battery, Electronics and Avionics.



* Reference image

Specifications

Model	TSA-1100H-W	TSA-1650H-W	TSA-2310H-W
High temperature range	+ 60°C to + 200°C		
Low temperature range	-70°C to -10°C		
Test area capacity	1,100 L	1,650 L	2,310 L
Test area dimensions (mm)	W1,000×H1,100×D1,000	W1,500×H1,100×D1,000	W2,100×H1,100×D1,000
Allowable load	100 kg	200 kg	300 kg

ESPEC CORP. <https://www.espec.co.jp>

3-5-6, Tenjinbashi, Kita-ku, Osaka 530-8550, Japan
Tel:+81-6-6358-4785 Fax:+81-6-6358-4786