


MATERIALS

BODY	BRASS NICKEL PLATED
BANANA PLUGS	BRASS NICKEL PLATED
HOUSING	POLYETHYLENE
CONTACT	GOLD PLATED
INSULATOR	POLYFORMALDEHYDE

ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS


IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5000 MΩ
OPERATING FREQUENCY	N/A
DIELECTRIC WITHSTANDING VOLTAGE	N/A
VSWR TYPICAL	N/A
INSERTION LOSS TYPICAL	N/A
OPERATING TEMPERATURE	+50 C°
VOLTAGE RATING	500 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B

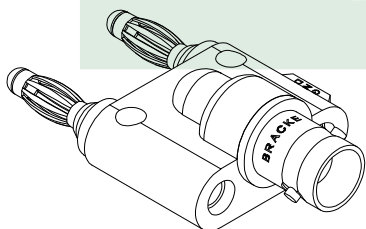

Scale 1:1



BRACKE
Bracke Manufacturing, LLC

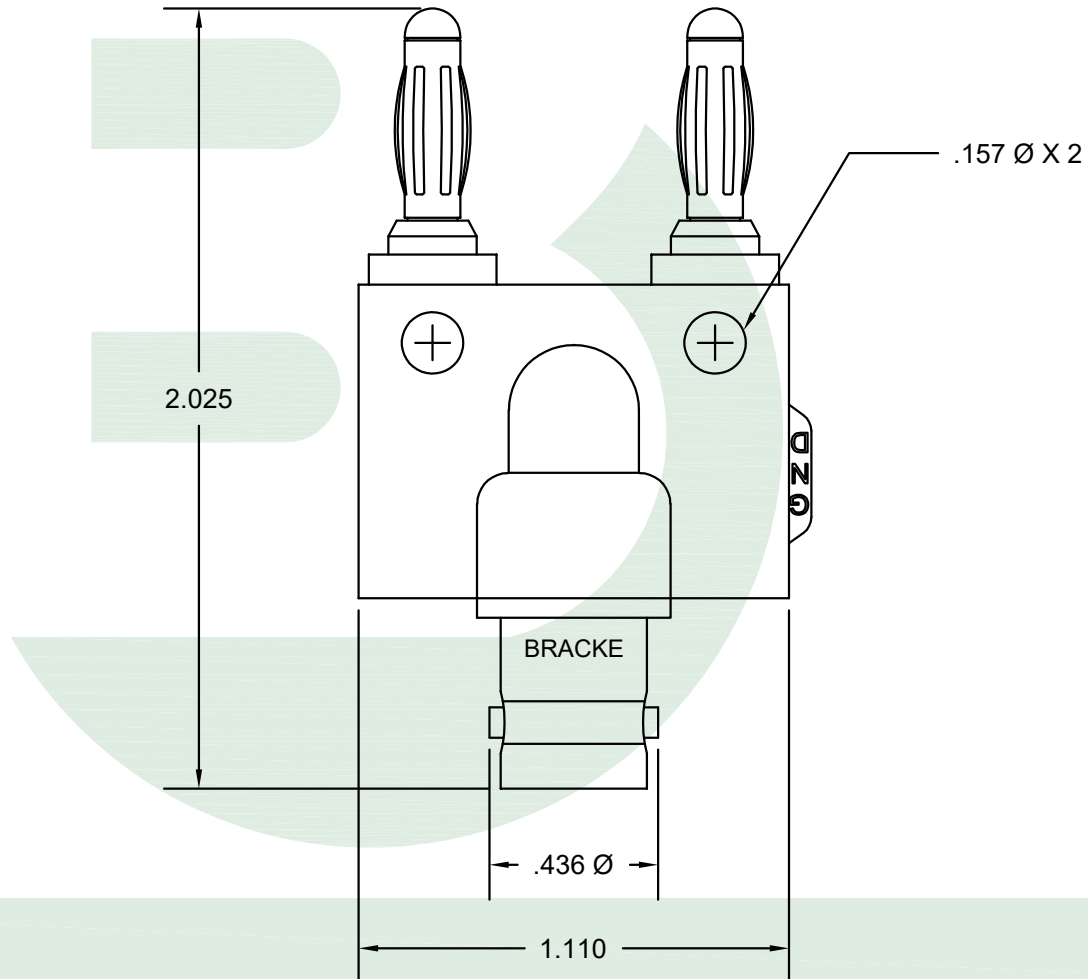


Bracke Manufacturing, LLC
PO Box 12319
Newport Beach, Ca 92658
Phone (949)756-1600 / Fax (949) 756-1601
sales@brackemfg.com / www.brackemfg.com

Part Number	
BM50469	
Produced By	Checked By
002	007

Description	
BNC Female to Double Banana Plug [Adapter]	
Notes	
<ul style="list-style-type: none"> • Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice. • The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent. 	
©2023 Bracke Manufacturing, LLC	

CAGE / NAGE	
6LOW2	
Scale	Unit
2:1	Inches
Date	Revision
4/20/2023	A-01