

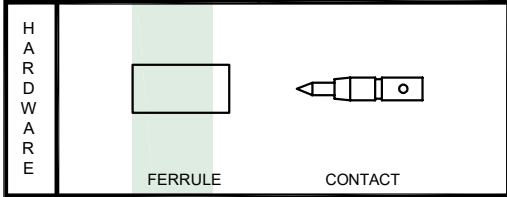
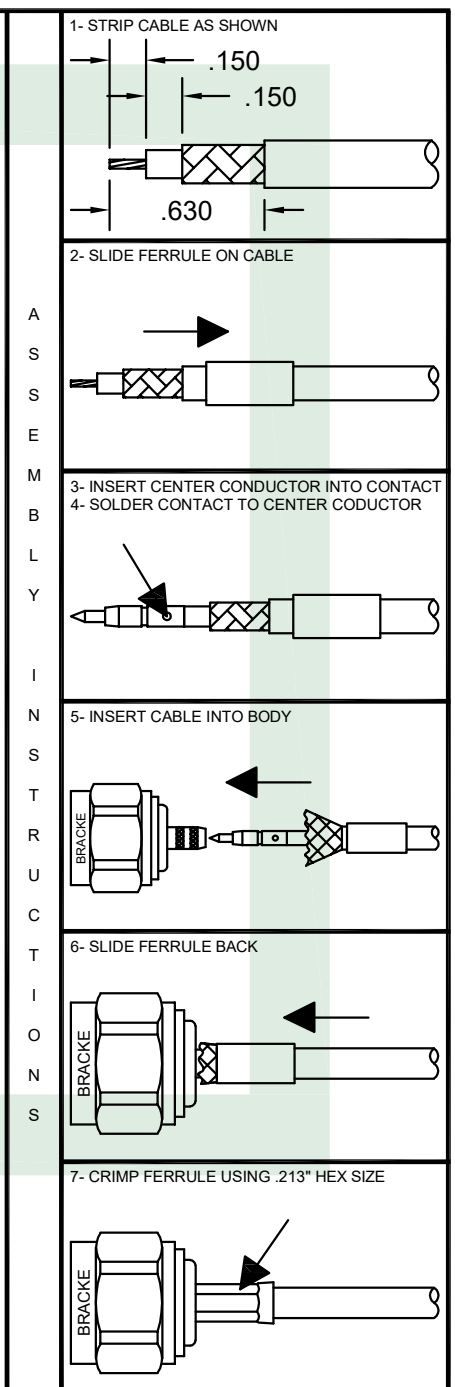


M A T E R I A L S	BODY	BRASS TRI-METAL PLATED
	CONTACT	SILVER PLATED
	INSULATOR	PTFE

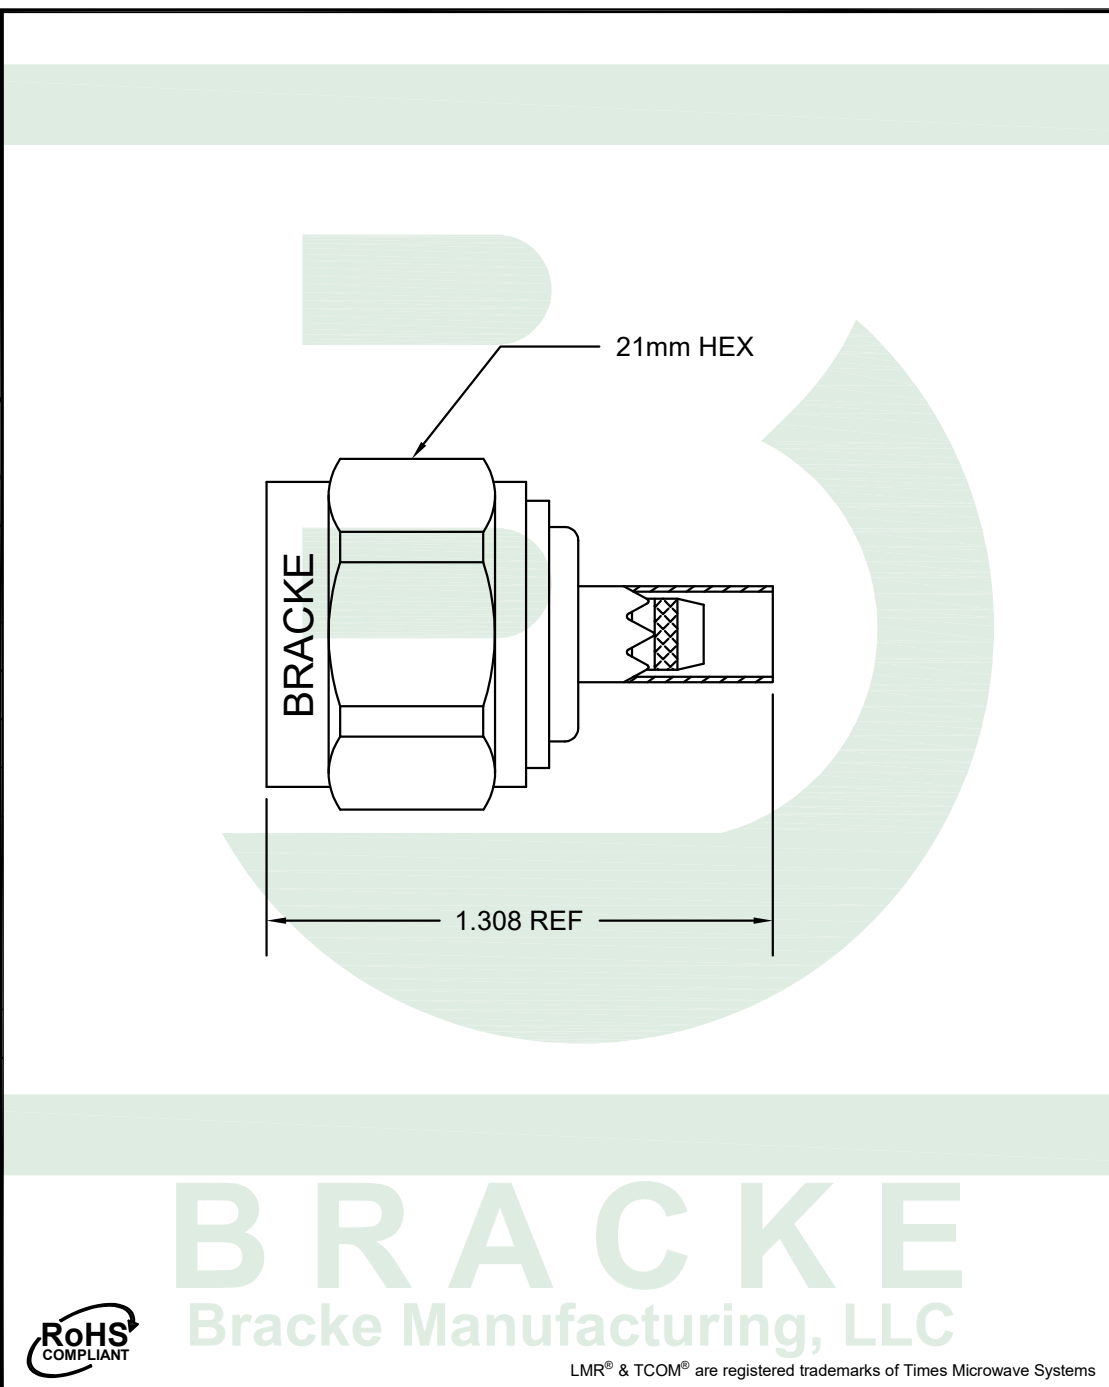

**ELECTRICAL & ENVIRONMENTAL CHARACTERISTICS**

IMPEDANCE	50 OHMS
INSULATION RESISTANCE	5,000 MΩ
OPERATING FREQUENCY	11 GHz
DIELECTRIC WITHSTANDING VOLTAGE	2,500 Vrms
VSWR TYPICAL	1.35:1
INSERTION LOSS TYPICAL	.06 √ Freq. GHz
OPERATING TEMPERATURE	-65 to +165 C°
VOLTAGE RATING	1,500 VOLTS
INTERFACE	MIL-STD-348
VIBRATION	MIL-STD-202 METHOD 204, CONDITION A
CORROSION	MIL-STD-202 METHOD 101, CONDITION B
PIM	≤ -160 dBc

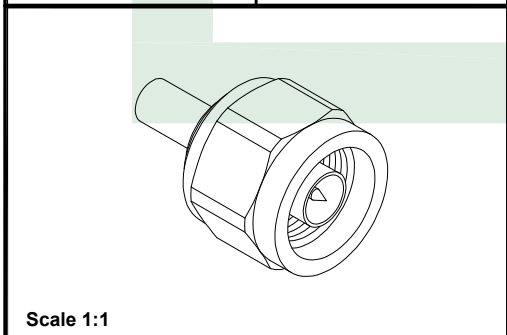

**BRACKE**  
Bracke Manufacturing, LLC

LMR® & TCOM® are registered trademarks of Times Microwave Systems



**Bracke Manufacturing, LLC**  
PO Box 12319  
Newport Beach, Ca 92658  
Phone (949)756-1600 / Fax (949) 756-1601  
sales@brackemfg.com / www.brackemfg.com

Part Number	
<b>BM61514</b>	
Produced By	Checked By
002	007

**Description**

**N Male, Low PIM**  
50 Ohm, Crimp Connector [LMR®-195, RG58, TCOM®-195]

**Notes**

- Bracke Manufacturing, LLC reserves the right to change any specifications at any time in its sole discretion without notice.
- The depiction above was produced by and is the sole property of Bracke Manufacturing, LLC and may not be copied or reproduced in any manner without Bracke's prior written consent.

©2023 Bracke Manufacturing, LLC

CAGE / NAGE	
6LOW2	
Scale	Unit
2:1	Inches
Date	Revision
11/02/2023	A-01